# Communication with Coarse Quantization

Mahdi Mahvari
Email: mahdi.mahvari@tum.de

We investigate two transmitters for communication over frequency-selective channels with additive white Gaussian noise (AWGN):

- Transmitter A corresponds to the upper branch of Fig. 1. The data symbols $\mathbf{u} = [u_1, \ldots, u_N]$, $u_i \in \mathcal{X}$, from the constellation $\mathcal{X}$ are converted from the digital to analog domain via a high-resolution DAC that has $n \gg 1$ bit resolution and operates at a rate $R_{\text{s}} = 1/T$.
- Transmitter B uses a nonlinear mapping $f : \mathcal{X}^N \to \{\pm 1\}^M$ that converts a length $N$ data vector $\mathbf{u}$ to a length $M$ binary vector $\mathbf{b} = [b_1, \ldots, b_M]$, $b_i \in \{\pm 1\}$, where $M \geq N$. A 1-bit DAC that runs at rate $R'_{\text{s}} = R_{\text{s}} N_{\text{os}}$, $N_{\text{os}} = M/N$, converts the binary vector $\mathbf{b}$ to a level-constrained signal $x_b(t)$; see Fig. 2.

The coarse DAC greatly reduces hardware cost and energy consumption in Transmitter B. In addition, a power amplifier after the DAC can be operated energy-efficiently, as $x_b(t)$ has a peak-to-average power ratio of 1. We assume that the receiver ADC has infinite precision and samples $y(t)$ at rate $R_{\text{s}}$ to produce the noisy symbols $\hat{\mathbf{u}} = [\hat{u}_1, \ldots, \hat{u}_N]$.

**Goal:** For a data vector $\mathbf{u}$, find the vector $\mathbf{b}$ that minimizes the MSE, i.e., solves

$$\operatorname{argmin}_{\mathbf{b}} \mathbb{E}\left[\|\mathbf{u} - \hat{\mathbf{u}}\|^2\right], \tag{1}$$

where the expectation is over the noise.

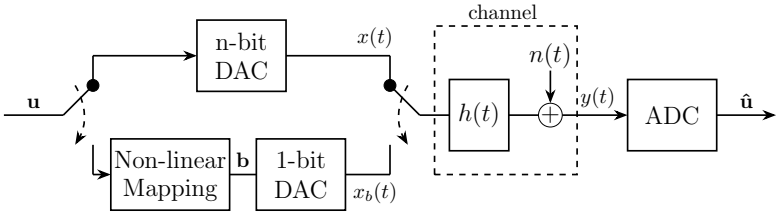


Fig. 1: AWGN channel with filter $h(t)$.

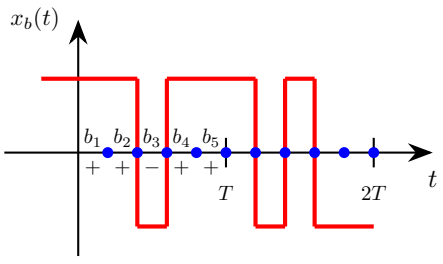


Fig. 2: Choice of a level-constrained signal $x_b(t)$ with $N_{\text{os}} = 5$.